
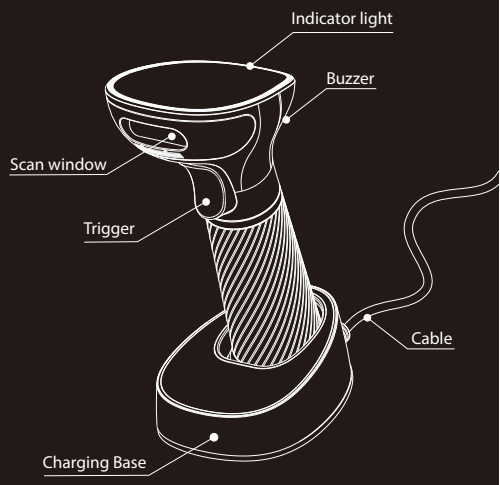



NEXA ZED2651/2951 WIRELESS 2D BARCODE SCANNER
— make scanning easy



Parts Instruction




Receiver Pairing



Scan the "Receiver Pairing Code" on the base
Factory Default: barcode scanner paired with base


Indicator Description

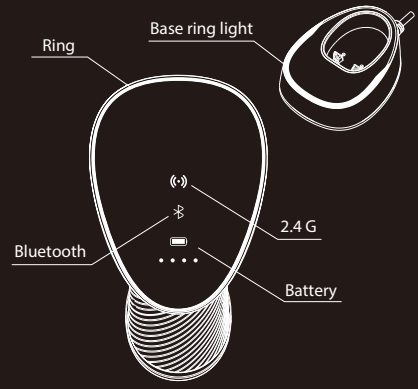

| Indicator Type | Details Description |
|--------------------|---|
| Battery | Four bars, charging flash |
| Wireless status | Bluetooth/2.4G connection |
| Pairing | Bluetooth/2.4G quick flash |
| Scanner ring light | One flash for one successful scanning |
| Base ring light | One flash for one successful data transferring Slow flash for pairing mode |

Product Introduction

This is the simple user's manual, for detailed manual, please download from our website or contact the supplier. (With * is the Default Setting)




Factory Default


If scanner cannot be used normally due to an error setting, try to scan the "Factory Default" code above.

| Buzzer Description | |
|------------------------------|--------------------------------|
| Voice Type | Details Description |
| One medium long high voice | Successful scanning or pairing |
| Three continuous short voice | Alarm prompt |


Wireless Transmission Mode




*2.4G



Bluetooth




Bluetooth BLE




Bluetooth SPP


Data Transfer Mode




*Immediate mode




Inventory mode



Clear all data




Upload data




Upload all data

Interface Type




*USB-HID




USB Virtual Com Port
(Driver is needed for USB Virtual Com Port)


Sleep Time




Sleep Immediately



*1 min




5 min




30 min


Language




*USA




France



Germany




Turkey Q




Poland


Language




Brazil



Italy




Spain




Universal language

*For more languages setting, please refer to the full manual.


Terminator




NONE




*CR



LF




TAB




CR/LF

Receiver Pairing




2.4G Receiver Pairing

Scanning the "Receiver Pairing" code, scanner will enter the automatic pairing mode for 1 minute, then re-insert the receiver to the host. There will be a sound heard when pairing successfully.



Bluetooth HID Pairing

Scan the "Bluetooth HID Pairing" barcode, the scanner is ready to be connected by other bluetooth devices.



Scanner Version Information