





To configure your Nexa NL-1800 / NC-1200 Scanner with an F7 suffix, please scan the barcodes below from top to bottom.

Start

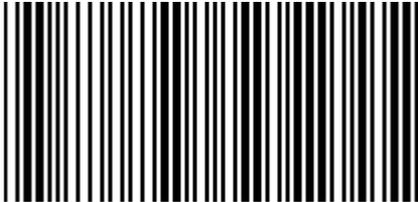

%+M7-1

Terminator = none

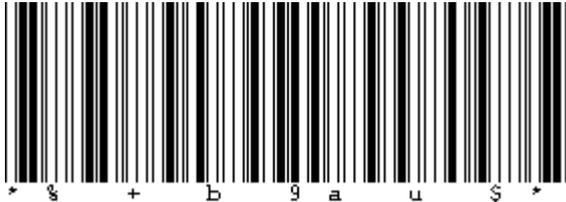


Postamble




%+E5AT

1




1

7



7

Confirm

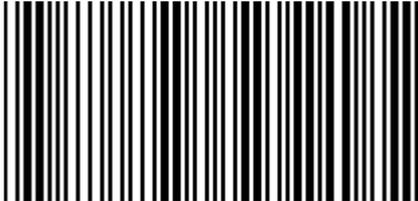


%+M7-6



Function Key Emulation Enable



End

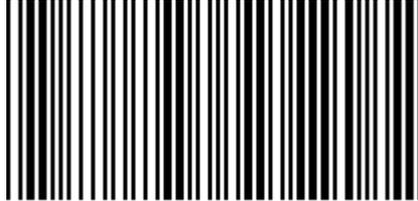

%+M7-5